Unitron's Innovative Product Family

Featuring Moxi and Stride
powered by Tempus

unitron™ Hearing matters

Moxi Driven by **Tempus**
Receiver-in-canal (RIC) Mild to severe

Moxi™ Now

Moxi Fit   Moxi Fit R   Moxi Kiss

Battery Size
10A

Available in
Pro
800
700
600
500

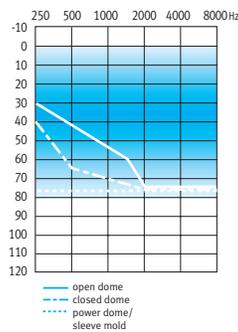### Features
- Virtually invisible behind the ear
- Choice of standard and power receivers
- Easy-t
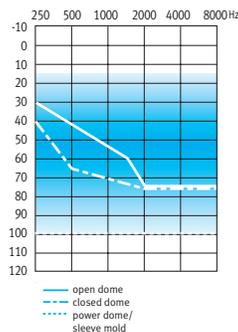- Wireless
- Plasma coating
- IP 68 Ingress Protection rating

Processing type
- WDRC
- Linear limiting

Fitting Range

open dome
closed dome
power dome/
sleeve mold

Standard Receiver (xS)
(47/111)

open dome
closed dome
power dome/
sleeve mold

Power Receiver (xP)
(57/124)

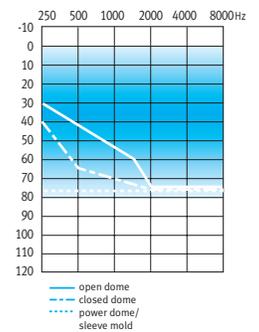### Battery Size
312

Available in
Pro
800
700
600
500

Features
- Push button (n/a Moxi Kiss)
- Rechargeable (Moxi Fit R only)
- Choice of standard, power and super power receivers
- Easy-t
- Telecoil (n/a Moxi Kiss)
- Wireless
- Plasma coating
- IP 68 Ingress Protection rating

Processing type
- WDRC
- Linear limiting

Fitting Range

open dome
closed dome
power dome/
sleeve mold

Standard Receiver (xS)
(47/111)

open dome
closed dome
power dome/
sleeve mold

Power Receiver (xP)
(57/124)

Super Power Receiver (xSP)
(62/125)

Moxi Dura   ((ı))

Stride™ P   Stride P Dura   Stride M   ((ı))

Battery Size
13

Available in
Pro
800
700
600
500

Features
- Push button
- Choice of standard, power and super power plus receivers
- Easy-t/telecoil
- Wireless ((ı))
- Plasma coating
- IP 68 Ingress Protection rating

Processing type
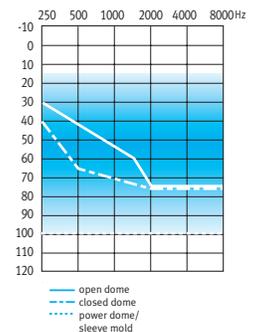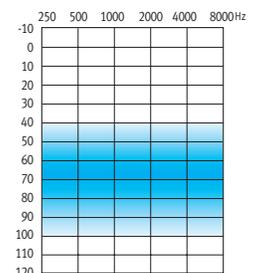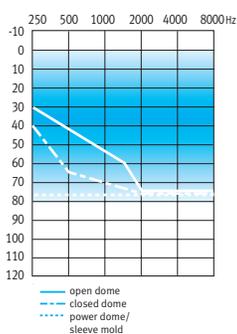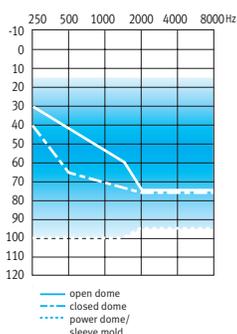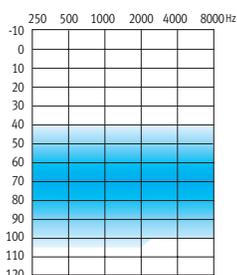- WDRC
- Linear limiting

Fitting Range

```
        250  500  1000  2000  4000  8000 Hz
-10
  0
 10
 20
 30
 40
 50
 60
 70
 80
 90
100
110
120
```
—— open dome
– – – closed dome
······ power dome/sleeve mold

Standard Receiver (xS)
(47/111)

```
        250  500  1000  2000  4000  8000 Hz
-10
  0
 10
 20
 30
 40
 50
 60
 70
 80
 90
100
110
120
```
—— open dome
– – – closed dome
······ power dome/sleeve mold

Power Receiver (xP)
(57/124)

```
        250  500  1000  2000  4000  8000 Hz
-10
  0
 10
 20
 30
 40
 50
 60
 70
 80
 90
100
110
120
```

Super Power Plus Receiver (xSP+)
(66/127)

Battery Size
13 (P and P Dura)
312 (M)

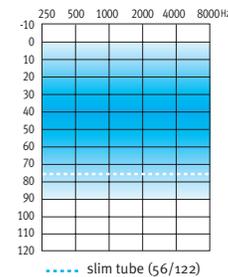## Available in
Pro
800
700
600
500

Features
- Push button
- Volume control (P only)
- Easy-t/telecoil
- DAI compatible (P Dura only)
- Earhook or slim tube
- Wireless ((ı))
- Plasma coating
- IP 68 Ingress Protection rating

Processing type
- WDRC
- Linear limiting

Fitting Range

```
        250  500  1000  2000  4000  8000 Hz
-10
  0
 10
 20
 30
 40
 50
 60
 70
 80
 90
100
110
120
```
····· slim tube (56/122)

Stride M
(63/129)

```
        250  500  1000  2000  4000  8000 Hz
-10
  0
 10
 20
 30
 40
 50
 60
 70
 80
 90
100
110
120
```
····· slim tube (58/126)

Stride P
(66/131)

```
        250  500  1000  2000  4000  8000 Hz
-10
  0
 10
 20
 30
 40
 50
 60
 70
 80
 90
100
110
120
```
····· slim tube (55/123)

Stride P Dura
(63/131)

Stride ▲ Powered by North

In-the-ear (ITE) Mild to severe
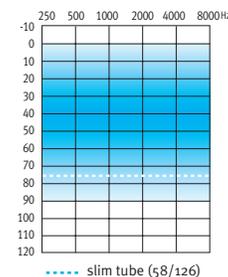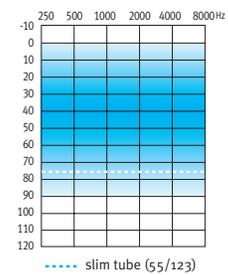
IIC

Battery Size
10A

Available in
Pro
800
700
600
500

Features
- Virtually invisible in the ear
- Thinner, stronger U:shell material
- IntelliVent
- MicProtect
- Push button battery door option
- Plasma coated door, guards and push button

Processing type
- WDRC
- Linear limiting

Faceplate colors

06 Black
14 Tan
22 Cocoa
26 Pink
28 Brown

Fitting Range
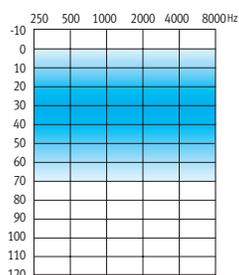
Moderate (M)
(40/112)

CIC/Mini canal

Battery Size
10A

Available in
Pro
800
700
600
500

Features
- Choice of 3 power levels
- U:shell digital shell process
- IntelliVent
- MicProtect (omni-directional)
- WaxShield
- Easy-t/telecoil
- Wireless
- Directional option*
- Push button battery door
- Remote functionality**
- Plasma coated door, guards, push button and VC

Processing type
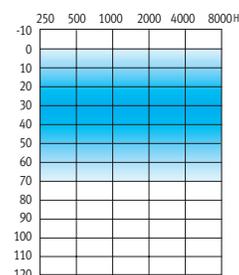- WDRC
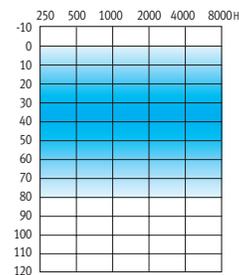- Linear limiting

Faceplate colors

14 Tan
22 Cocoa
26 Pink
28 Brown
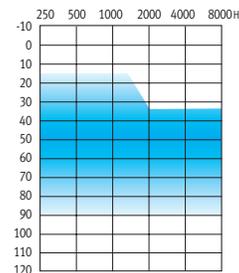
*Mini canal only
**Wireless CIC and wireless Mini canal

Fitting Range

Moderate (M)
(40/112)

Power (P)
(50/118)

High Power (HP)
(60/122)

Canal/Half shell/Full shell

Super Power (SP)

Super Power Mini (SPm)

Battery Size
312
13

Available in
Pro
800
700
600
500

Features
- Choice of 4 power levels
- U:shell digital shell process
- IntelliVent
- WaxShield
- Easy-t/telecoil
- Wireless
- Remote functionality
- Plasma coated door, guards, push button and VC

Processing type
- WDRC
- Linear limiting

Faceplate and shell colors

14 Tan

22 Cocoa

26 Pink

28 Brown

Fitting Range
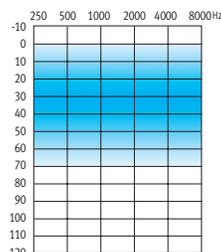
Moderate (M)
(40/112)
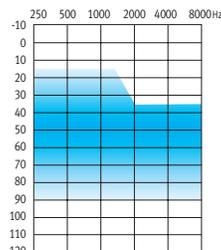
Power (P)
(50/118)

High Power (HP)
(60/122)
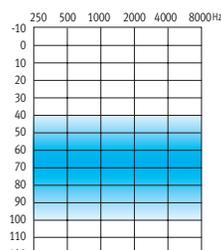
Super Power (SP)
(70/130)

Battery Size
675 (SP)
13 (SPm)

Available in
20
6
E

Features
- Push button
- Volume control
- Easy-t/telecoil
- DAI compatible
- Earhook or power slim tube
- Wireless
- Plasma coating
- IP 57 Ingress Protection rating

01 Beige

03 Brown

05 Light gray

06 Black

12 Charcoal

35 Taupe

36 Trans. red

37 Trans. blue

41 Pearl white

Do Stone
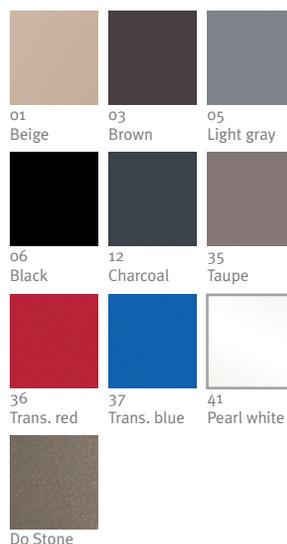
Fitting Range
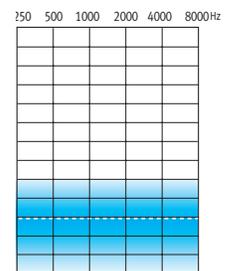
----- Power slim tube

Super Power (SP)
(82/142)

----- Power slim tube

Super Power Mini (SPm)
(75/140)

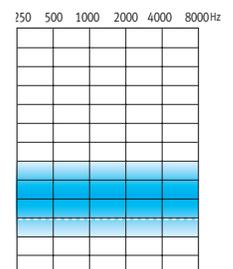| SoundCore		Moxi RIC and Stride BTE Driven by Tempus				
		T Pro	T 800	T 700	T 600	T 500
SoundNav Automatic Program - Identifies and classifies sounds across environments, with a focus on conversations.	Music	•	•			
	Noise	•	•	•		
	Conversation in a crowd	•	•	•		
	Conversation in a small group	•	•	•		
	Conversation in quiet	•	•	•	•	
	Conversation in noise	•	•	•	•	
	Quiet	•	•	•	•	
	Total environments	7	7	6	3	AutoMic
SpeechPro - Provides optimal speech understanding and localization, even in the most challenging environments.	SpeechPro	•	SpeechZone™ 2	SpeechZone		
	Speech Locator	•	•	•		
	Speech Focus	•				
	Dynamic Spatial Awareness	•				
Sound Conductor - Dynamically balances features to provide speech understanding, comfort and natural sound.	Speech enhancement	•	•	•	•	•
	Noise reduction	•	•	•	•	•
	Adaptive directionality	Multiband	Multiband	Multiband	Multiband	•
Spatial Awareness - Makes it easier to localize sound for a more natural listening experience.	Spatial Awareness	Dynamic	Personalized	•		
	Pinna Effect	•	•	•	•	•
Sound Stabilization						
	AntiShock 2	•	•	•	•	•
	Wind control	•	•	•	•	•
	Feedback manager	•	•	•	•	•
	Natural Sound Balance	•	•	•	•	•
Experience Innovations						
Patient Insights	Log It All	•	•	•	•	•
	Patient Ratings	•	•	•	•	•
	Data logging	•	•	•	•	•
Flex	Flex:trial™	•	•	•	•	•
	Flex:upgrade™		•	•	•	•
Convenience						
	Rechargeable (Moxi Fit only)	•	•	•	•	•
	DuoLink	•	•	•	•	•
	Telecoil and Easy-t*	•	•	•	•	•
	Binaural Phone	•	•	•	•	
Fitting						
	Automatic Adaption Manager	•	•	•	•	•
	MyMusic	Binaural	Binaural	•	•	•
	Frequency compression	•	•	•	•	•
	Tinnitus masker	•	•	•	•	•
	IntelliVent	•	•	•	•	•
	Streaming programs	•	•	•	•	•
	Manual programs	•	•	•	•	•
	NAL-NL2/NL1 and DSLv5	•	•	•	•	•
	Fitting channels	20	20	16	10	6
Accessories						
Compatability may be limited by product style	Remote control 2, uMic, uStream, uDirect™ 3, wireless programming with iCube II	•	•	•	•	•

*Telecoil availability varies by model

☑ **Flex**

Performance features		Stride ITE — Powered by North					Max		
		Pro	800	700	600	500*	Max™ 20	Max 6	Max E
	SoundNav Automatic Program	7 environments	6 environments	5 environments	2 environments	Auto Mic	4	2	
	SpeechZone™ 2	•							
	SpeechZone		•						
	Binaural spatial processing	•	•						
	SmartFocus™ SP						•	•	•
	Patient control SmartFocus SP						•		
	Sound Conductor	•	•	•	•	•			
	Pinna Effect	•	•	•	•	•	•		
	Bass enhancer						•	•	•
	Adaptive directionality	Multiband	Multiband	Multiband	Multiband	•	Multiband	Multiband	
Sound Stabilization									
	AntiShock™	•	•	•	•	•	•	•	•
	Wind noise manager	•	•	•	•	•	•	•	•
	Feedback manager	•	•	•	•	•	•	•	•
	Natural Sound Balance	•	•	•	•	•			
Experience Innovations									
Patient Insights	Log It All	•	•	•	•	•			
	Patient Ratings	•	•	•	•	•			
	Data logging	•	•	•	•	•	Detailed	Basic	Basic
Flex	Flex:trial						•	•	•
	Flex:upgrade		•	•	•	•		•	•
Convenience									
	DuoLink™	•	•	•	•	•	•	•	•
	Telecoil and Easy-t**	•	•	•	•	•	•	•	•
	Binaural Phone	•	•	•	•	•	•		
Fitting									
	Automatic Adaptation Manager	•	•	•	•	•	•	•	•
	Power Adaptation Manager						•	•	•
	myMusic™	Automatic binaural	Automatic binaural	•	•	•	•	•	•
	Frequency compression	•	•	•	•	•	•	•	•
	Tinnitus masker	•	•	•	•	•			
	IntelliVent	•	•	•	•	•	•	•	•
	Streaming programs	3	3	3	3	3	3	3	
	Manual programs	Up to 3	Up to 3	Up to 3	Up to 3	Up to 4	Up to 3	Up to 3	Up to 4
	Fitting channels	20/20	20/20	16/16	10/10	6/6	20/20	6/6	6/6
Accessories									
Compatability may be limited by product style	Remote control 2, uMic, uStream, uDirect™ 3, wireless programming with iCube II	•	•	•	•	•	uDirect 2, no uStream	uDirect 2, no uStream	uDirect 2, no uStream

*Unitron Moxi Now not available at the 500 technology level on the North platform
**Telecoil availability varies by model

✓ Flex

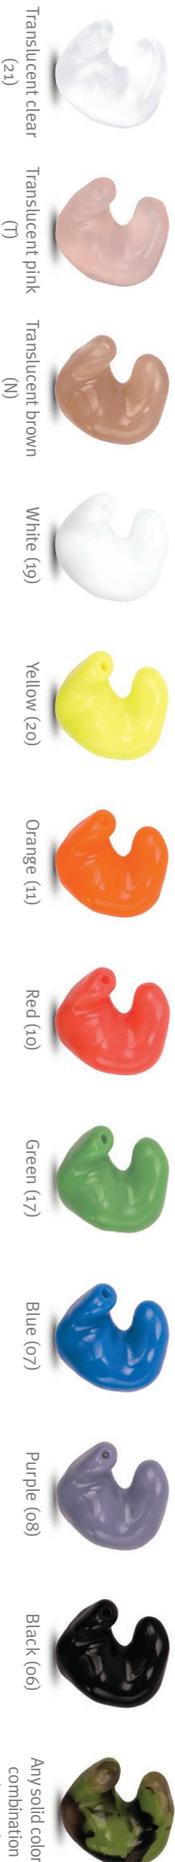# Moxi RIC and Stride BTE style comparison

Shown at actual size

Moxi RIC and Stride BTE color selection

o1 Beige	
P2 Amber*	
P4 Espresso	
P6 Platinum	
P7 Pewter	
P8 Charcoal*	
Q9 Cinnamon*	
S2 Amber suede	
S3 Espresso boost*	
S5 Pewter shine	
S6 Sand storm*	
S7 Teal blast*	

Moxi Now
Moxi Fit
Moxi Fit R
Moxi Kiss
Moxi Dura
Stride M
Stride P Dura
Stride P

red dot award 2015 winner

iF product design award 2016 winner / red dot award 2014 winner

red dot award 2016 winner

Earmold styles and colors

Earmold styles	
Full shell	
Skeleton	
Semi-skeleton	
CROS	
Half shell	
Canal	
Canal lock	
Hollow sleeve	
Solid sleeve	
cShell	

Translucent (Acrylic & Silicone) Earmolds

- Translucent clear (21)
- Translucent pink (T)
- Translucent brown (N)

Solid Silicone Earmolds

- White (19)
- Yellow (20)
- Orange (11)
- Red (10)
- Green (17)
- Blue (07)
- Purple (08)
- Black (06)
- Any solid color combination (up to 3)

Swirls

Glitter Silicone Earmolds

- Sugar cube (L3)
- Lemon drop (K8)
- Bubble gum (K5)
- Cotton candy (K6)
- Cherry popsicle (K7)
- Raspberry fizz (V8)
- Sugar plum (L1)
- Wintermint (L4)
- Tealicious (W1)
- Blueberry slush (K4)
- Royal blast (V9)
- Shimmering moonbeam (W2)

*Not available for Moxi Fit R